




ŻALUZJE POGODOWE

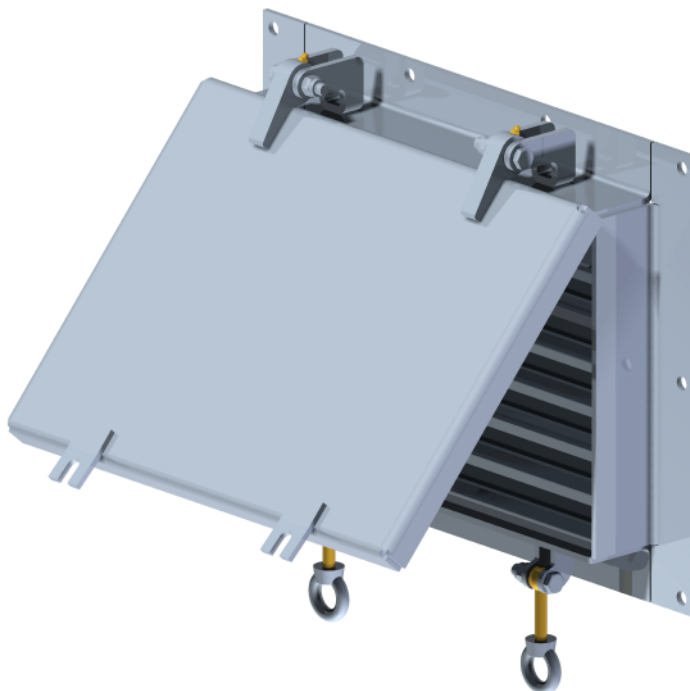

ZASTOSOWANIE

Wysokowytrzymałe żaluzje pogodowe są przeznaczone do zastosowań okrętowych.

SR-F

Prostokątne, jednobrzegowe żaluzje pogodowe, z poziomymi łopatkami, do montażu na grodzi.
Montaż wewnętrzny lub zewnętrzny.
Dostępne w różnych rozmiarach.

SRL-F

Prostokątne jednobrzegowe żaluzje pogodowe do montażu na grodzi.
Montaż wewnętrzny lub zewnętrzny.
Żaluzje wyposażone są w klapę na zawiasach z uszczelką neoprenową i bolcami zabezpieczającymi z nakrętkami blokującymi z uchem.
Z zawiasami od góry, od dołu lub z boku.
Dostępne w różnych rozmiarach.

SSVent

Prostokątna, równoległa przepustnica łopatkowa, do montażu na grodzi.
Może być stosowany do sterowania przepływem powietrza lub jako przepustnica odcinająca.
Łopatki przepustnicy i wały wykonane są z AISI 316L
Model SSVent - FS jest również wyposażony w stałe, pojedyncze żaluzje w części przedniej.
Obsługiwany ręcznie lub automatycznie, sterowany pneumatycznie lub elektrycznie.
Dostępne w różnych rozmiarach.

KONSTRUKCJA

Wieloletnie doświadczenie przyczyniło się do powstania prostej i funkcjonalnej konstrukcji.
Dostępne są również rozwiązania na specjalne zamówienie w celu realizacji specyfikacji klientów

WYKONANIE

Zwykle produkowane z ocynkowanej ognioowo stali okrętowej klasy A.
Inne materiały to odporne na wodę morską aluminium lub stal nierdzewna.




WEATHER LOUVRES


SR - F




SRL - F

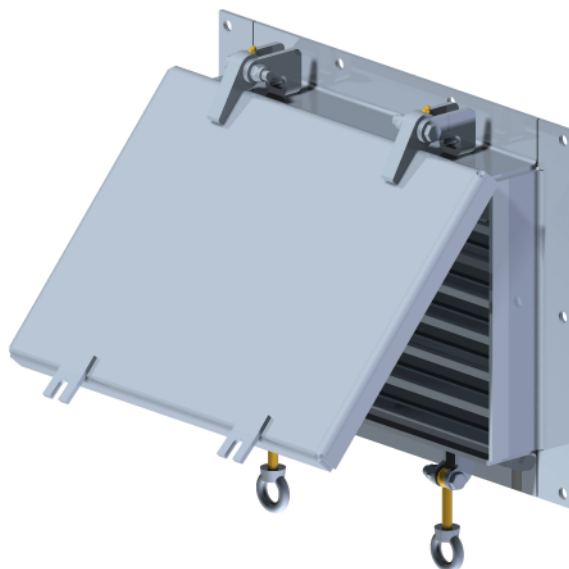

SSVENT

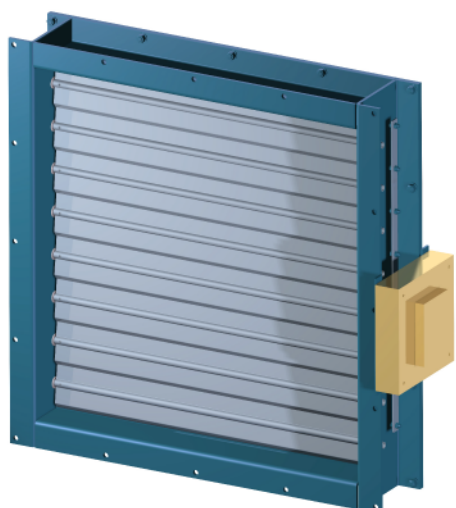

SSVENT - FS

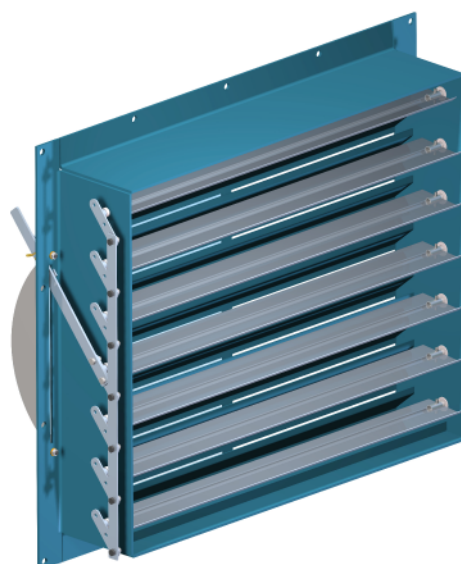

NYBORG - MAWENT

NYBORG-MAWENT S.A.
ul. Ciepła 6, 82-200 Malbork
tel.: +48 55 646 63 00
fax: +48 55 646 63 09
office@nyborg-mawent.com
www.nyborg-mawent.com




NYBORG AS
N-6230 Sykkylven, Norway
tel.: +47 70 25 40 80
fax: +47 70 25 29 08
office@nyborgfan.com
www.nyborgfan.com




NYBORG SHUTABLE BLADE DAMPER

SSVent

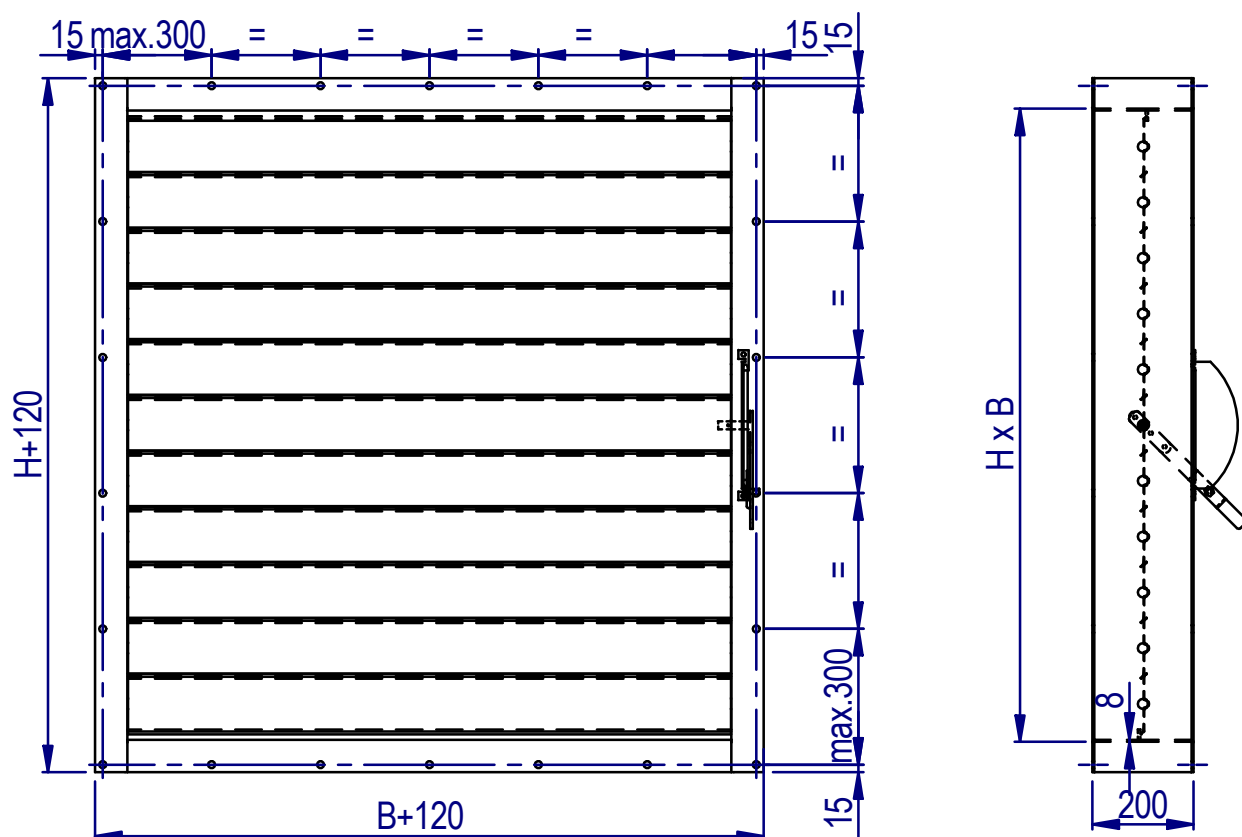

NYBORG SHUTABLE BLADE DAMPER :
SSVent BxH, made of hot dipped galv. Steel.
Damper blades and shafts in AISI 316L.
Can also be equipped with electrical or pneumatical actuators.

H	H
260	1470
370	1580
480	1690
590	1800
700	1910
810	2020
920	2130
1030	2240
1140	2350
1250	2460
1360	2570

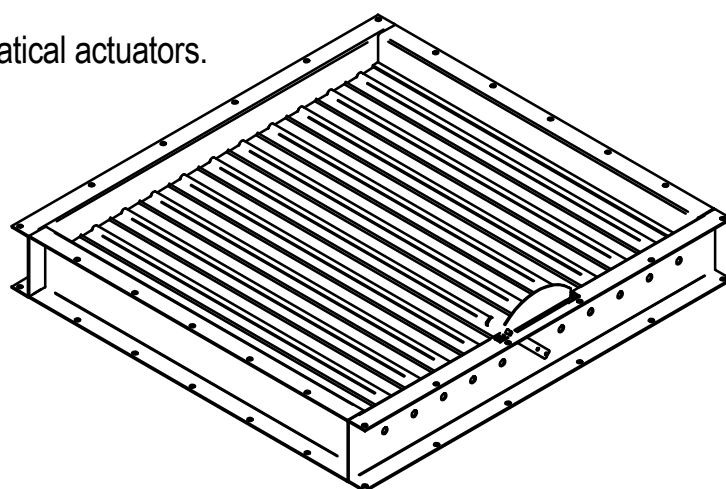

15/11-02

R.Berge
4-2137



NYBORG - MAWENT

NYBORG-MAWENT S.A.
ul. Ciepła 6, 82-200 Malbork
tel.: +48 55 646 63 00
fax: +48 55 646 63 09
office@nyborg-mawent.com
www.nyborg-mawent.com





NYBORG AS
N-6230 Sykkylven, Norway
tel.: +47 70 25 40 80
fax: +47 70 25 29 08
office@nyborgfan.com
www.nyborgfan.com

SSVent



NYBORG SHUTABLE BLADE DAMPER

SSVent
B x H FS

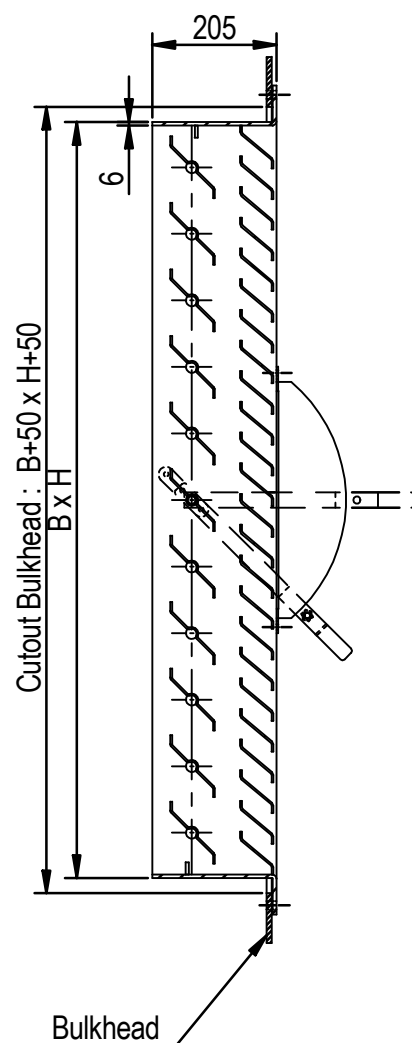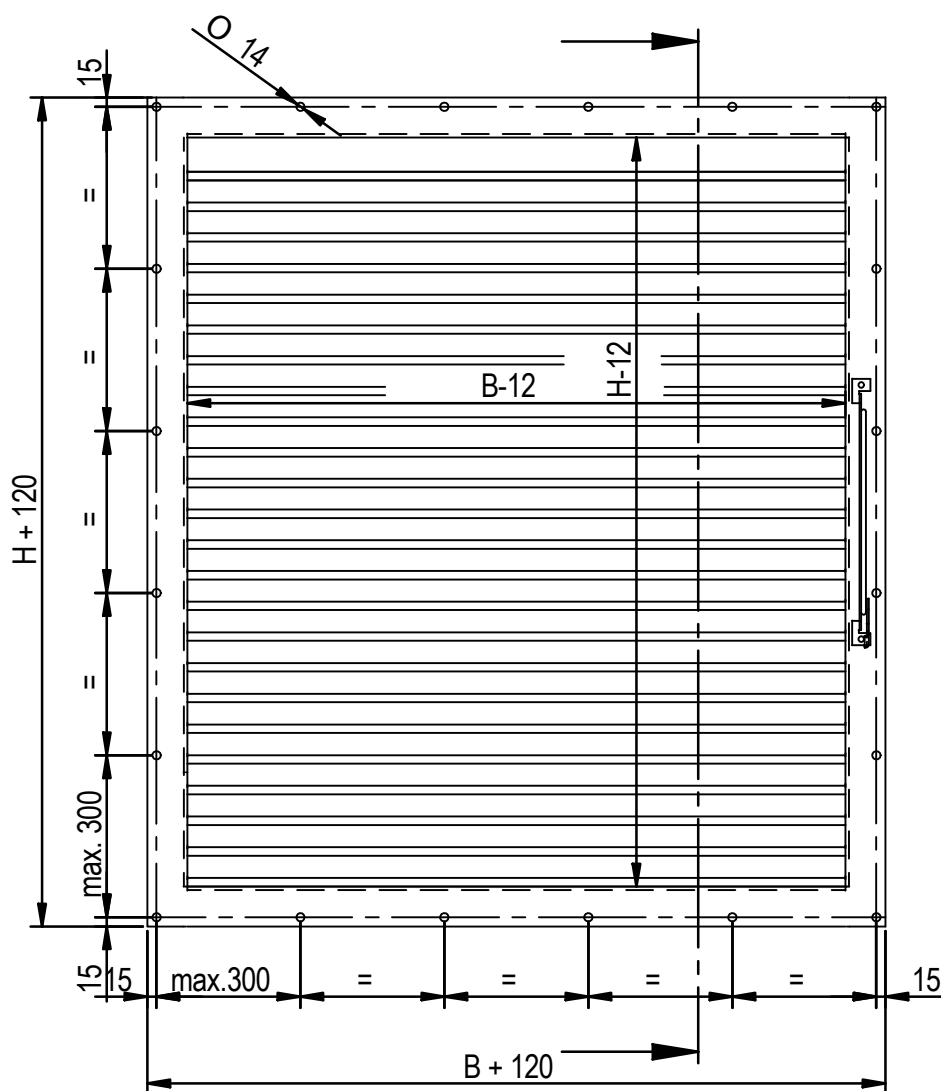

B	H		B	H
	260			1470
	370			1580
	480			1690
	590			1800
	700			1910
	810			2020
	920			2130
	1030			2240
	1140			2350
	1250			2460
	1360			2570

NYBORG BLADE DAMPER SSVent B x H FS , made of hot dipped galv. St.37. Damper blades and shafts in AISI 316L.

29/08-00

R.Berge

4-2103



NYBORG - MAWENT

NYBORG-MAWENT S.A.
ul. Ciepła 6, 82-200 Malbork
tel.: +48 55 646 63 00
fax: +48 55 646 63 09
office@nyborg-mawent.com
www.nyborg-mawent.com




NYBORG AS
N-6230 Sykkylven, Norway
tel.: +47 70 25 40 80
fax: +47 70 25 29 08
office@nyborgfan.com
www.nyborgfan.com

SSVent
B x H FS



SR B x H F
SINGLE BANK WEATHER LOUVER
FOR MOUNTING ON OR INSERTION IN BULKHEAD

SR
B x H F

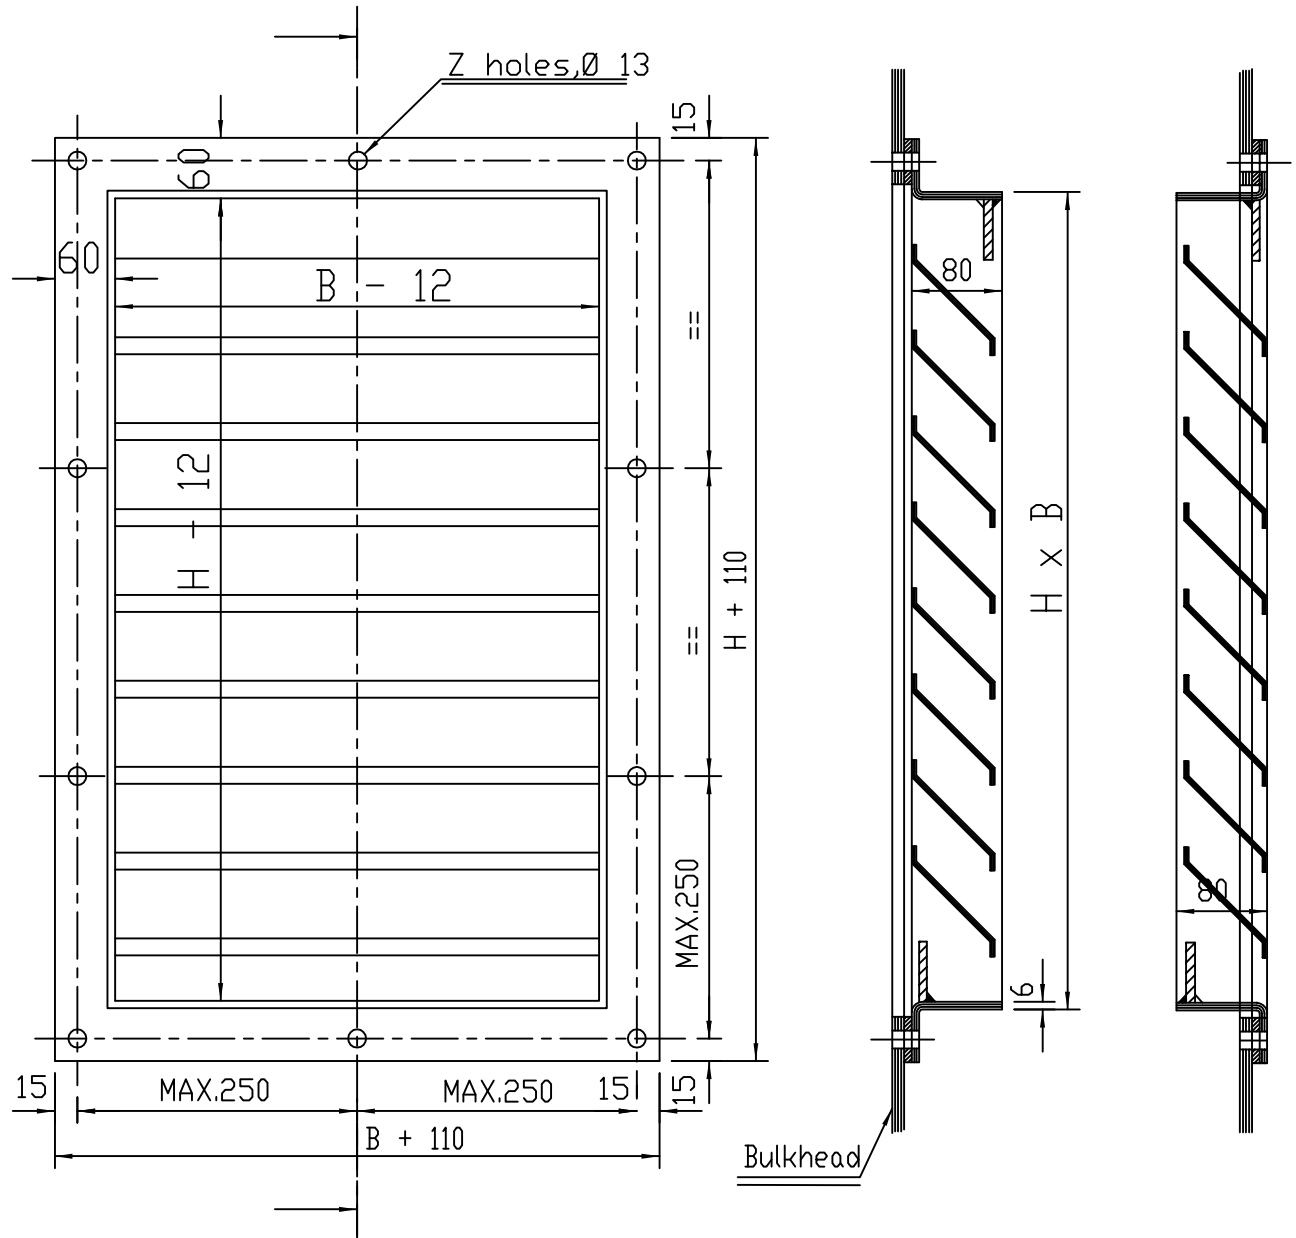

Date : 25.08.94

Tegn : 4-1110

Name : R.Berge



NYBORG - MAWENT

NYBORG-MAWENT S.A.
ul. Ciepla 6, 82-200 Malbork
tel.: +48 55 646 63 00
fax: +48 55 646 63 09
office@nyborg-mawent.com
www.nyborg-mawent.com



NYBORG AS
N-6230 Sykkylven, Norway
tel.: +47 70 25 40 80
fax: +47 70 25 29 08
office@nyborgfan.com
www.nyborgfan.com



SR
B x H F



SINGLE BANK WEATHER LOUVER FOR INSERTION IN BULKHEAD

SR B x H G

SR
B x H G

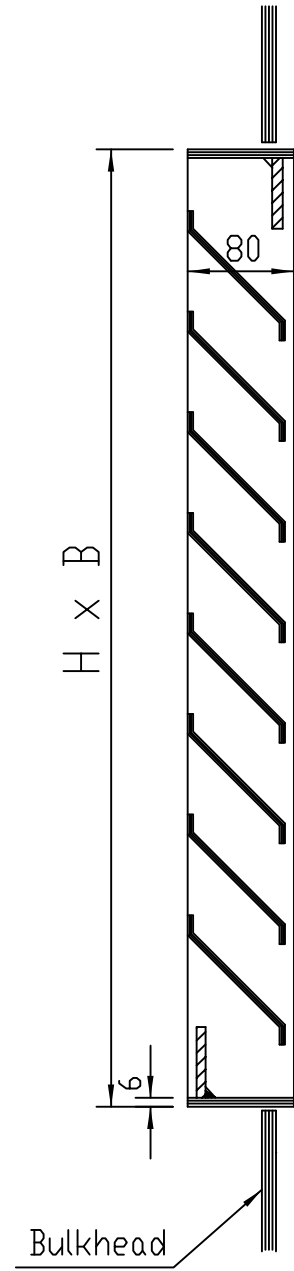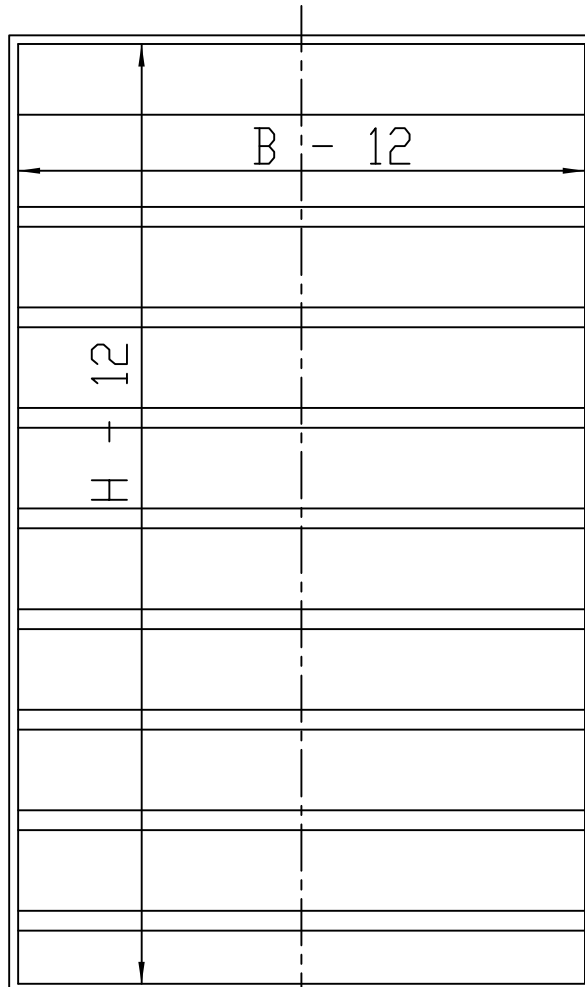

Date : 25.08.94

Tegn : 4-1109-2

Name : R.Berge



NYBORG - MAWENT

NYBORG-MAWENT S.A.
ul. Ciepla 6, 82-200 Malbork
tel.: +48 55 646 63 00
fax: +48 55 646 63 09
office@nyborg-mawent.com
www.nyborg-mawent.com




NYBORG AS
N-6230 Sykkylven, Norway
tel.: +47 70 25 40 80
fax: +47 70 25 29 08
office@nyborgfan.com
www.nyborgfan.com

SR
B x H G



SRL B x H F

SRL - F



- * Hot Dipped Galv., or Aluminium Alloy.
- * Sea Spray Protected Blades.
- * Heavy Duty Neoprene Gasket.
- * Hinges and Screw Joints in Stainless Design.
- * Top- or Sidehinged Cover.
- * B X H, Measurement for Cutting Torch on Bulkhead.

[illegible]

Name : R.Berge



NYBORG - MAWENT



NYBORG AS
N-6230 Sykkylven, Norway
tel.: +47 70 25 40 80
fax: +47 70 25 29 08
office@nyborgfan.com
www.nyborgfan.com



SRL - F



WEATHER LOUVRE, c/w Hinged Cover

SRL B x H G

SRL-G

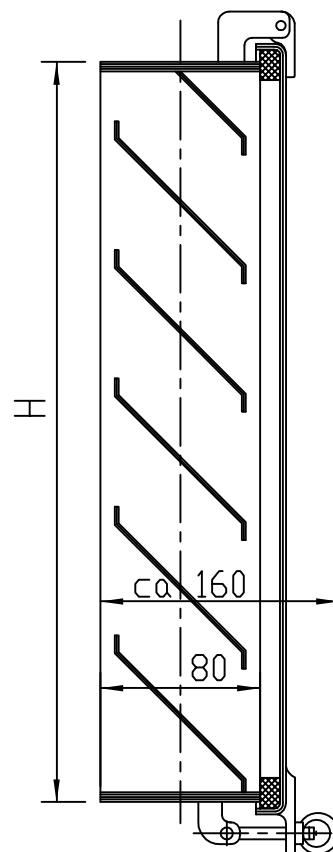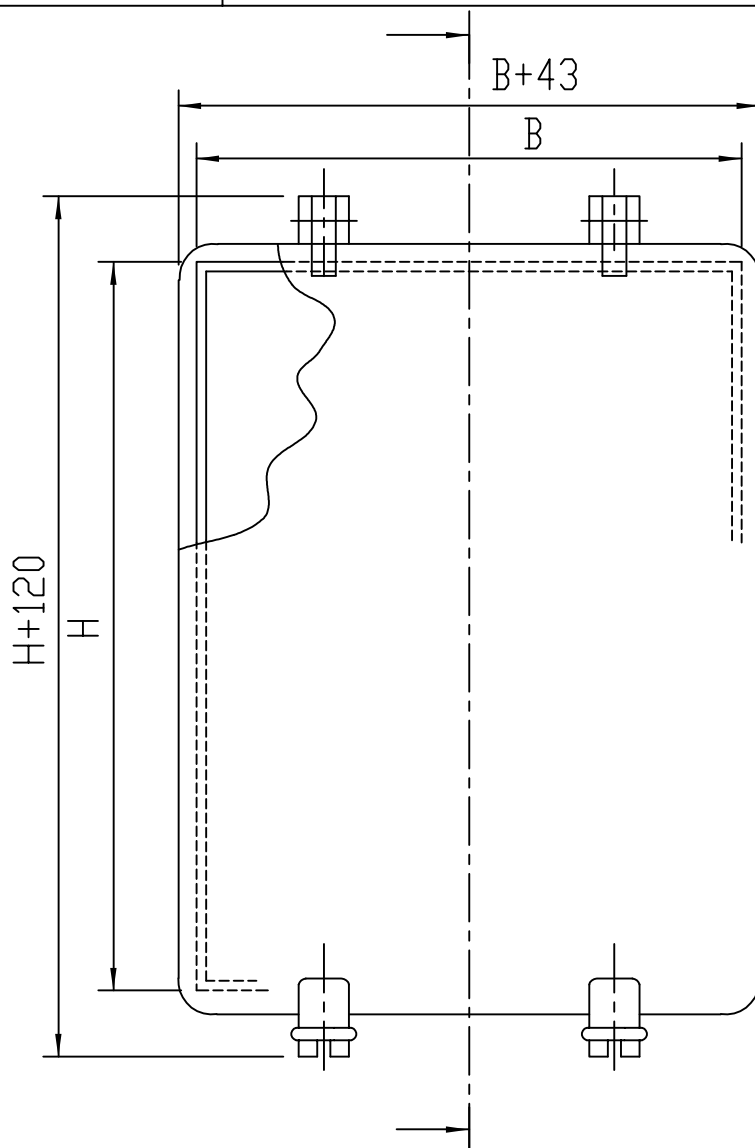

Weather Louvre, c/w Hinged Cover

- * Hot Dipped Galvanized.
- * Sea Spray Protected Blades.
- * Heavy Duty Neoprene Gasket.
- * Hinges and Screw Joints in Stainless Design.
- * Top- or Sidehinged Cover.
- * B X H, Measurement for Cutting Torch on Bulkhead.

B	H

06/09-94

R.Berge

4-1111



NYBORG - MAWENT

NYBORG-MAWENT S.A.
ul. Ciepla 6, 82-200 Malbork
tel.: +48 55 646 63 00
fax: +48 55 646 63 09
office@nyborg-mawent.com
www.nyborg-mawent.com



NYBORG AS
N-6230 Sykkylven, Norway
tel.: +47 70 25 40 80
fax: +47 70 25 29 08
office@nyborgfan.com
www.nyborgfan.com

SRL-G